

CORNICE

SPC 5.0 MM, 12 MIL




Incline | NFRCU0101



Peak | NFRCU0102



Belle | AGRCU0106

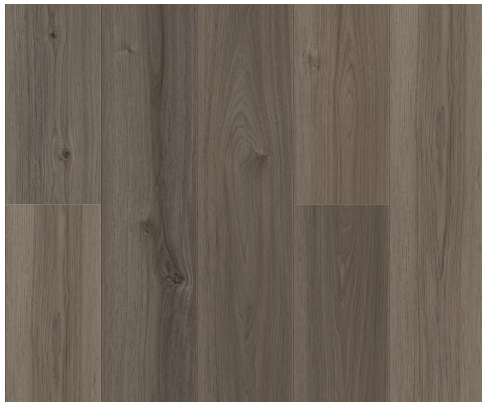

Mammoth | NFRCU0107



Bridger | NFRCU0108

SPECIFICATIONS

Construction	SPC Rigid Core, Stone Polymer Composite
Dimensions	7" Wide x 48" Long, 182 mm x 1220mm
Overall Thickness	5.0 mm (includes 1 mm pad)
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Installation	Angle / Angle
Warranty	25 Yr Residential, 5 Yr Light Commercial, 5 Yr Multi-Family,
Packaging	26.26 sf/carton - 50 carton/pallet - 1313 sf/pallet

INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimate product to normal room conditions
- Recommended Room Temp: 60°F-85°F after install
- Expansion Space: 1/4" gap
- Transition required for rooms larger than 50'W x 50'L
- Subfloors dry and flat (3/16" in 10')

Read Complete Instructions Before Installing



**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**

tasflooring.com

